


TDXPress NYLON BALLOONS

Part Number	Material	Dia. (A) (mm)	Balloon Length (B) (mm)	Sleeve Length (mm)	Prox/Distal ID (inches) +/- .002"	Prox/Distal Cones (degrees)	Rated/Avg. Burst (atm)
40129-02	Nylon	2.0	8	5	.035/.035	20/20	12/16
40129-12	Nylon	2.0	20	5	.035/.035	20/20	12/16
40129-13	Nylon	2.0	30	5	.035/.035	20/20	12/16
40129-06	Nylon	3.0	15	5	.044/.044	20/20	12/16
40129-14	Nylon	3.0	20	5	.044/.044	20/20	12/16
40129-15	Nylon	3.0	40	5	.044/.044	20/20	12/16
40133-08	Nylon	4.0	20	5	.094/.094	34/34	10/14
40133-09	Nylon	4.0	30	5	.094/.094	34/34	10/14
40133-01	Nylon	4.0	40	5	.092/.092	34/34	10/14
40133-10	Nylon	6.0	30	5	.083/.083	18/18	8/12
40133-11	Nylon	6.0	40	5	.083/.083	18/18	8/12
40133-03	Nylon	6.0	80	5	.083/.083	18/18	8/12
40133-05	Nylon	8.0	40	5	.091/.091	34/34	8/12
40133-16	Nylon	8.0	60	5	.091/.091	34/34	8/12
40133-13	Nylon	10.0	40	5	.091/.091	18/18	6/10
40133-14	Nylon	10.0	60	5	.091/.091	18/18	6/10
40133-07	Nylon	10.0	80	5	.091/.091	18/18	6/10
40133-15	Nylon	10.0	30	5	.091/.091	18/18	6/10

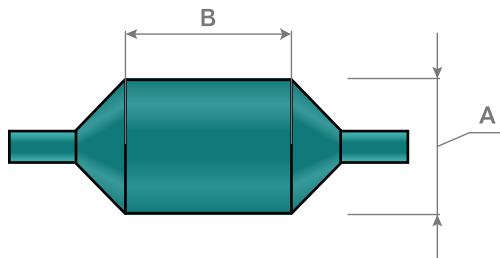

Nylon is a non-compliant balloon material that:

- can be used for medium to high pressures, but requires a thicker wall than PET
- tends to be more durable
- is a clear material
- is typically sterilized by means of Eto
- can be thermally welded or adhesive bonded

4/25/11

TechDevice Standard Products – Short Lead Times
CORPORATION



ISO 13485
CERTIFIED

1-888-TECHDEV • www.techdevice.com • 617-972-5800

FDA
REGISTERED