


TDXPress PET BALLOONS

Part Number	Material	Dia. (A) (mm)	Balloon Length (B) (mm)	Sleeve Length (mm)	Prox/Distal ID (inches) +/- .002"	Prox/Distal Cones (degrees)	Rated/Avg. Burst (atm)
40132-02	PET	2.0	8	5	.035/.035	20/20	12/16
40132-12	PET	2.0	20	5	.035/.035	20/20	12/16
40132-13	PET	2.0	30	5	.035/.035	20/20	12/16
40132-06	PET	3.0	15	5	.047/.047	20/20	12/16
40132-14	PET	3.0	20	5	.047/.047	20/20	12/16
40132-15	PET	3.0	40	5	.047/.047	20/20	12/16
40128-13	PET	4.0	20	5	.094/.094	34/34	10/14
40128-14	PET	4.0	30	5	.094/.094	34/34	10/14
40128-12	PET	4.0	40	5	.094/.094	34/34	10/14
40128-15	PET	6.0	30	5	.085/.085	18/18	8/12
40128-16	PET	6.0	40	5	.085/.085	18/18	8/12
40128-02	PET	6.0	80	5	.085/.085	18/18	8/12
40128-04	PET	8.0	40	5	.095/.095	34/34	8/12
40128-21	PET	8.0	60	5	.095/.095	34/34	8/12
40128-18	PET	10.0	40	5	.097/.097	18/18	6/10
40128-19	PET	10.0	60	5	.097/.097	18/18	6/10
40128-06	PET	10.0	80	5	.097/.097	18/18	6/10
40128-20	PET	10.0	30	5	.097/.097	18/18	6/10
40128-09	PET	16.0	55	5	.085/.085	18/18	4/5

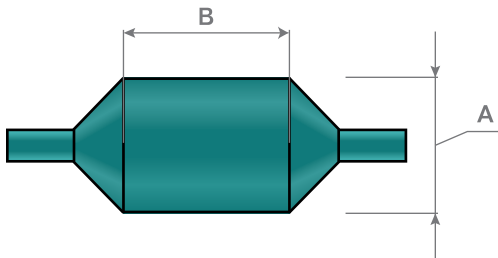

PET is a non-compliant balloon material that:

- can be used for high pressures
- is primarily used because it can be molded into thin wall configurations for low profiles
- is a clear material
- is typically sterilized by means of Eto or Radiation
- is adhesive bonded

1/23/12

TechDevice Standard Products – Short Lead Times
CORPORATION



ISO 13485
CERTIFIED

1-888-TECHDEV • www.techdevice.com • 617-972-5800

FDA
REGISTERED